

3 Way Ball Valve - S37

Design Feature

High Quality Investment Casting

Body And Caps Blow-out Proof Stem

Connection: Threaded BSP, NPT, BSPT

Material: CF8, CF8M


Pressure Rate: 1000PSI

Temperature Range: -20~210°C

Reduced Bore/ "L", "T" Port




Pressure Vs Temperature Chart

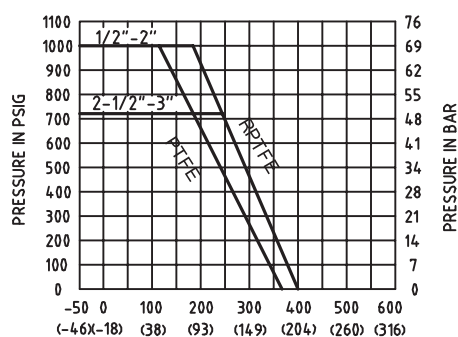

Materials of Main Construction:

Name	Material
Body	SS316/304
Cop	SS316/304
Ball	SS316/304
Body Seat	PTFE
Body Seat	PTFE
Stem Seat	PTFE
Stem Packing	PTFE
Stem Woshr	SS304
Spring Washer	SS304
Stem nut	SS304
Stem	SS316/304
Handle	SS201
Handle sleeve	plastic

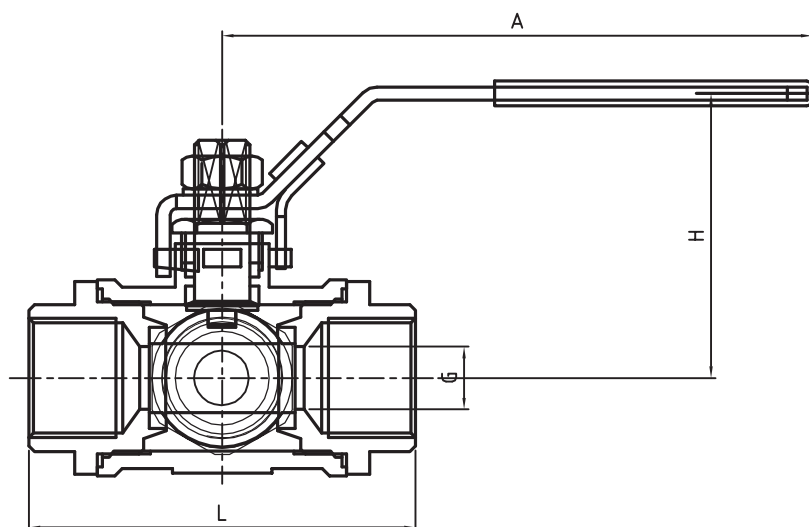

Dimension:(mm)

DN	G	L	B	A	H
15	1/2"	70	12	110	58
20	3/4"	83	14	120	60
25	1"	92	18	140	70
32	1-1/4"	125	25	140	82
40	1-1/2"	140	32	180	95
50	2"	155	38	200	100